

YOURNAME = _____

To Install GV-iView, search for **Geovision** or **GV-iView** in the Apple App store. Download and install the program (it's free).

Configure GV-iView for Your Cameras

1. Click on the GV-iView application on your iPhone to launch.
2. On the login screen, enter the IP address of your system "**YOURNAME**.dipmap.com:4444". Also enter your user ID and password for your system.



3. Click Done.
4. Once you are connected, the 6 camera view screen will appear as seen below.



5. From the 6 camera view screen, click on any of the cameras to change to a single camera view for that camera. To the right of the camera, there is a menu system.



My Favorite

On the login screen you find the "My Favorite" option, allowing you to add links to TCS-DVR Systems for quick connections. To save a new favorite, click the "+" sign, enter the info and click "save".



Remote Playback (RPB)

To retrieve the events recorded on the TCS-DVR System and play them back:

1. On the login screen, press RPB View.




2. Enter the IP address of the System "**YOURNAME**.dipmap.com", port value is 5511, ID and Password. Then press Done.

You can also search the recordings after a specified date and time. For this setting, select RPB Time Setting and enter the date and time.



3. Select the desired recordings from the event list for playback. Use the Change cam button at the top right corner to switch cameras.

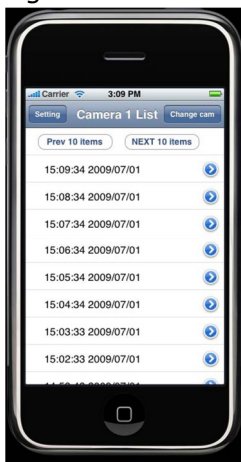

TOTAL CONTROL
SECURITY

(403) 505-8000 WWW.TCSECURITY.COM